


GLASS FILLED
NYLON PLUGS
INCLUDED

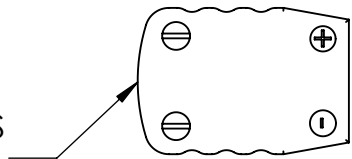

PART NO.	CONDUCTOR MATERIAL	T/C TYPE
FA13539	CHROMEL / ALUMEL	K
FA13539-02	IRON / CONSTANTAN	J
FA13539-03	TUNGSTEN / RHENIUM *	C
FA13539-04	CHROMEL / CONSTANTAN	E


RATINGS	
CONDUCTOR MATERIAL:	SEE TABLE AT LEFT
T/C TYPE:	SEE TABLE AT LEFT
TEMPERATURE WITHOUT PLUG:	-269°C TO 450°C
TEMPERATURE WITH PLUG:	-29°C TO 218°C

*TYPE C USES COMPENSATING WIRE
MAXIMUM JUNCTION TEMPERATURE IS 250°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE: THREE PAIR T/C SPADE TYPE
FEEDTHROUGH

PART NO. (SEE TABLE) REV. A

SST

SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA13539SL REV. A1

REV.	APP'D	DATE	SCALE 1:1	DIMENSIONS IN INCHES [mm]	DRAWN	JM	1/4/2006
A1	MH	05/26/2006	MPDP0034-1ST		ENG APPR.	MH	05/26/2006